

The image features a dynamic splash of water in the upper half, transitioning into a bright yellow liquid in the lower half. The background is black with faint, concentric circular lines and a grid pattern. The text 'F B' is in a large, bold, yellow font, with 'G R O U P' in a smaller, white, spaced-out font below it. The word 'WaterBlast' is written in a white, italicized font on the right side.

F B
G R O U P

WaterBlast

Code Article	Thread	HOSE		Dimensions (mm)		Standpipe
		Inch / Pollici	DN (mm)	CH	A	


DKOS - METRIC O-RING FEMALE, 24° CONE, HEAVY
DKOS - WATERBLAST FEMMINA METRICA O-RING, CONO 24°, SERIE PESANTE

WBFES1004	M18x1,5	1/4	6	22	27	10
WBFES1204	M20x1,5	1/4	6	24	31	12
WBFES1406	M22x1,5	3/8	10	27	32	14
WBFES1606	M24x1,5	3/8	10	32	34	16
WBFES1608	M24x1,5	1/2	12	32	34	16
WBFES2512	M36x2	3/4	19	46	44	25
WBFES3016	M42x2	1"	25	50	45	30




DKOR - WATERBLAST BSP FEMALE THRUST WIRE NUT, 60° CONE
DKOR - WATERBLAST FEMMINA BSP DADO SPINATO, CONO 60°

WBF0404	1/4-19	1/4	6	22	24
WBF0606	3/8-19	3/8	10	25	26
WBF0808	1/2-14	1/2	12	30	32
WBF1212	3/4-14	3/4	19	36	34
WBF1616	1"-11	1"	25	46	37



AGN - WATERBLAST NPTF MALE
AGN - WATERBLAST MASCHIO NPTF


WBMNPT0404	1/4-19	1/4	6	17	28
WBMNPT0606	3/8-19	3/8	10	19	32
WBMNPT0808	1/2-14	1/2	12	22	37
WBMNPT1212	3/4-14	3/4	19	27	37,5
WBMNPT1616	1"-11	1"	25	36	47,5



Code Article	Thread	HOSE		Dimensions (mm)	
		Inch / Pollici	DN (mm)	D	L


SKIVE FERRULE WATERBLAST FOR HOSE 4 SPIRALS
BOCCOLA WATERBLAST A PELARE PER TUBO 4 SPIRALI

B4WB04	1/4	6	24	50
B4WB06	3/8	10	28	54
B4WB08	1/2	12	36	58
B4WB12	3/4	19	42	65
B4WB16	1"	25	50	82



SKIVE FERRULE WATERBLAST FOR HOSE 6 SPIRALS
BOCCOLA WATERBLAST A PELARE PER TUBO 6 SPIRALI

B6WB04	1/4	6	27	50
B6WB06	3/8	10	32	54
B6WB08	1/2	12	36,5	58
B6WB12	3/4	19	44	65
B6WB16	1"	25	-	-



The **WaterBlast** range is characterized from resistance and functionality guaranteeing safety and excellent performance in the washing lines.

The **WaterBlast** fittings have been developed for the hoses from 700 to 1200 bars, with 4 or 6 spirals.

The high pressure hoses are used in the following applications:


- ▶ Surface renovation
- ▶ Ship maintenance
- ▶ Runway cleaning
- ▶ Swimming pool cleaning
- ▶ Paint removal

La gamma **WaterBlast** si distingue per resistenza e funzionalità garantendo sicurezza e ottime performance nelle linee di lavaggio.

I raccordi **WaterBlast** sono stati sviluppati per tubazioni da 700 a 1200 bar, con 4 o 6 spirali.

Le condotte ad altissime pressioni sono utilizzate nelle seguenti applicazioni:

- ▶ Pulizia delle superfici
- ▶ Manutenzione navale
- ▶ Rimozione pitture stradali
- ▶ Pulizia piscine
- ▶ Rimozione vernici

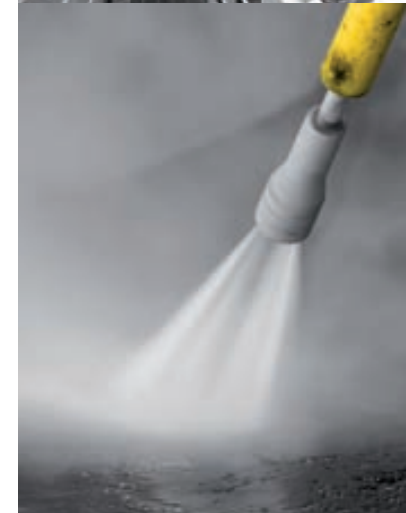



40050 Castello d'Argile (Bologna) - Italy - Via Provinciale Nord, 26/A
Tel. +39 051.97.66.35 Fax +39 051.97.65.72

Web : www.fb-channel.net

